
















DETECTION AND RANGING SOLUTIONS

COMPACT, RELIABLE DETECTION AND DISTANCE MEASUREMENT

2D laser scanners, 3D laser scanners, radar sensors


SICK
Sensor Intelligence.

Product		Principle of operation				Applications									
		Navigation	Detection	Measurement	Multi-echo technology	Level measurement	Checking height	Area monitoring	Checking presence	Collision prevention	Position detection	Electronic routing	Range finding	Shape recognition	Classification
2D laser scanners															
	TiM series		■				■	■	■	■					
	TiM5xx			■			■	■		■	■	■			
	S100		■						■	■					
	LMS series		■	■	■	■	■	■	■	■	■	■	■	■	■
	LMC1xx		■	■	■			■	■						
	LMS5xx		■	■	■	■	■	■		■	■	■	■	■	■
	LMS4xx		■	■		■	■		■		■		■	■	
	LD series		■	■		■	■			■			■		
	LD-LRS		■	■		■		■		■	■	■			
	NAV series		■	■	■						■	■	■	■	
	NAV3xx		■	■	■						■			■	
3D laser scanners															
	LD-MRS		■	■	■	■	■	■		■	■	■	■	■	■
Radar sensors															
	RAS4xx							■	■	■					

Working ranges (with 10 % remission)														Page
20 m	40 m	60 m	80 m	100 m	120 m	140 m	160 m	180 m	200 m	220 m	240 m	260 m	280 m	

 0.05 m ... 10 m (8 m)	→ 4
 0.05 m ... 25 m (8 m)	→ 4
 0.05 m ... 10 m (4.5 m)	→ 4
 0.5 m ... 50 m (30 m)	→ 5
 0.5 m ... 20 m (18 m)	→ 5
 0.7 m ... 80 m (40 m)	→ 5
 0.7 m ... 3 m	→ 6
 0.5 m ... 250 m (55 m)	→ 6
 0.5 m ... 250 m (80 / 120 m)	→ 7
 0.5 m ... 50 m (18 m)	→ 7
 0.5 m ... 250 m (35 m)	→ 7




 0.5 m ... 300 m (50 / 30 m)	→ 8
--	-----

 0.2 m ... 20 m	→ 9
--	-----

		
TIM3xx	TIM5xx	S100
Incredibly good at detection	Complete measurement accuracy	Easy for anticollision

Technical data overview				
Field of application	Indoor	Indoor	Indoor	
Aperture angle	270°	270°	270°	
Operating range	0.05 m ... 10 m	0.05 m ... 25 m	0 m ... 10 m	
Angular resolution	0.33°, 1°	0.33°, 1°, 3°	0.5°, 1°	
Max. range with 10 % reflectivity	2 m / 8 m	2 m / 8 m	4.5 m	
Scanning frequency	15 Hz	15 Hz	25 Hz	
Heating	-	-	-	
Ethernet	- / ✓	- / ✓	-	
CAN bus	-	-	✓	
USB	✓ , micro USB	✓ , micro USB	-	
Serial (RS-232, RS-422)	- / -	✓ / -	✓ / -	
Weight	150 g / 250 g	150 g / 250 g	1.2 kg	

At a glance

<ul style="list-style-type: none"> • Configure without a PC using “touch and teach” • Small, lightweight and economical measurement sensor • Field evaluation using intelligent algorithms • Set parameter interface is accessible while device is mounted • One of the smallest laser scanners on the market • Proven industrial design • Low power consumption (typ. 3 W) 	<ul style="list-style-type: none"> • Monitoring area of up to 235 m² with just one sensor • High ambient light tolerance due to HDDM technology • Rugged housing with up to an IP 67 enclosure rating • Low power consumption of just 3 W • Compact design with a housing height of just 86 mm maximum • Integrated Ethernet interface • Long sensing range of up to max. 10 m • Industry-standard design and M12 male connector 	<ul style="list-style-type: none"> • Small, lightweight and economical measurement sensor • Field evaluation using intelligent algorithms • Parameter setting interface is accessible from the front while the device is mounted
		

Detailed information	→ www.mysick.com/en/TIM3xx	→ www.mysick.com/en/TIM5xx	→ www.mysick.com/en/S100
----------------------	--	--	--



LMS1xx

Compact and economical, even in harsh environments



LMC1xx

Laser Measurement Certified (LMC) – intelligent and flexible security



LMS5xx

Reliable and precise, even over long distances

	Indoor Outdoor Security	Security Indoor / Security Outdoor	Indoor Outdoor Security
	270°	270°	190°
	0.5 m ... 50 m	0.5 m ... 20 m	0 m ... 80 m
	0.25°, 0.5°	0.25°, 0.5°	0.166°, 0.167°, 0.25°, 0.333°, 0.5°, 0.667°, 1°
	18 m / 30 m	18 m	26 m / 40 m
	25 Hz / 50 Hz	50 Hz	25 Hz / 35 Hz / 50 Hz / 75 Hz / 100 Hz
	No / yes	No / yes	Yes
	✓	✓	✓
	✓	✓	- / ✓
	-	-	✓, Mini-USB
	✓ / -	✓ / -	✓ / ✓
	1.1 kg	1.1 kg	3.7 kg

- Efficient and cost-effective 2D laser scanner for measuring ranges of up to 50 m
- Outstanding performance whatever the weather, thanks to multi-echo technology and intelligent algorithms
- Rugged, compact housing with enclosure rating up to IP 67, integrated heating and a temperature range from -40 °C and +60 °C
- Variants for security applications with relay outputs and VdS certification available
- Measurement data output via Ethernet interface in real time
- Number of switching outputs can be expanded via external CAN modules



→ www.mysick.com/en/LMS1xx

- The only VdS-certified laser scanner on the market (German certificate standard)
- Highest class “C” with environmental class II or IVa
- Flexible connection to DC 9 V to 30 V
- Two isolated relays (alarms) and one obstruction output
- Long detection range of 20 m, horizontal and vertical
- Up to 10 freely definable monitoring fields with intelligent evaluation algorithms
- Certified QuickStart menu
- 200 RAL colors available





→ www.mysick.com/en/LMC1xx



- Powerful and efficient laser scanner for measuring ranges of up to 80 m
- Outstanding performance in adverse weather conditions due to multi-echo technology
- Compact housing up to IP 67 enclosure rating and built-in heater for outdoor devices
- Low power consumption
- Fast signal processing
- Multiple I/Os
- Synchronization of multiple sensors possible



→ www.mysick.com/en/LMS5xx

	 <p style="text-align: center;">LMS4xx</p>	 <p style="text-align: center;">LD-OEM</p>	
	Fast and reliable, for precise measurement of distances and contours	Long-range laser technology for use in harsh industrial environments	

Technical data overview			
Field of application	Indoor	Indoor	
Aperture angle	70°	360°	
Operating range	0.7 m ... 3 m	0.5 m ... 250 m	
Angular resolution	0.1° ... 1.0°, configurable	0.125°, 0.1875°, 0.25°, 0.375°, 0.5°, 0.75°, 1°, 1.5°, interlaced: 0.0625°	
Max. range with 10 % reflectivity	3 m	55 m	
Scanning frequency	180 Hz ... 500 Hz	5 Hz ... 20 Hz	
Heating	-	-	
Ethernet	✓	✓	
CAN bus	-	-	
Serial (RS-232, RS-422)	✓ / -	✓ / ✓	
Weight	2.3 kg	2.4 kg	

At a glance			
	<ul style="list-style-type: none"> • The “Level Control” application integrated in the sensor is, with its gapless scanning surface, able to perform “shadowless” detection of objects in containers. Even small objects, regardless of color, are detected anywhere in the container. • Large dynamic measurement range of 0.7 m to 3 m • Rugged design • High angular resolution and scanning frequency • Ideal for depalletizing tasks, contour verification and vision applications on pallets <div style="text-align: center; margin-top: 20px;">  </div>	<ul style="list-style-type: none"> • Long scanning range even when detecting dark surfaces • Eye-safe, class 1 laser technology • High angular resolution of up to 0.125 degrees • High level of immunity to solar radiation and other infrared light sources • Synchronous monitoring of up to four freely definable fields • Real-time output of measurement data via Ethernet interface • Gap-free scanning with uniform laser spot over the full 360-degree angle <div style="text-align: center; margin-top: 20px;">  </div>	

Detailed information	→ www.mysick.com/en/LMS4xx	→ www.mysick.com/en/LD-OEM	
----------------------	--	--	--



LD-LRS

High-Performance, long-distance laser Scanner for outdoor areas



NAV2xx

Position determination and navigation – even in highly demanding conditions



NAV3xx

Precise laser NAVIGATION for maximum efficiency

Indoor
360°
0.5 m ... 250 m
0.125°, 0.1875°, 0.25°, 0.375°, 0.5°, 0.75°, 1°, 1.5°, interlaced: 0.0625°
80 m / 120 m
5 Hz ... 15 Hz
Yes
✓
-
- / ✓
9.1 kg

Outdoor
270°
0.5 m ... 50 m, 30 m on reflectors
0.001°, on reflectors 0.25°, on raw / contour data
18 m
25 Hz
Yes
-
-
✓ / -
1.1 kg

Indoor
360°
0.5 m ... 250 m, 70 m on reflectors, 0.5 m ... 70 m on reflectors
0.125°, 1.875°, 0.25°, 0.375°, 0.5°, 0.75°, 1°, interlaced: 0.0625°
35 m
5 Hz ... 20 Hz, 8 Hz, ± 5 %
-
✓
-
✓ / ✓
2.4 kg

- Long scanning range, even when detecting dark surfaces
- High angular resolution of up to 0.0625 degrees
- High immunity to solar radiation
- Synchronous monitoring of up to four different fields
- Small laser spot diameter even at long distances



→ www.mysick.com/en/LD-LRS

- Integrated data evaluation for determining reflector positions
- Scanning range of up to 30 m on reflectors, up to 18 m on black (10 % remission), maximum of up to 50 m
- Collection angle: 270°
- Scanning frequency: 25 Hz
- Angle resolution on reflectors: 0.001°
- Temperature resistant from -30 °C to +50 °C
- IP 67 enclosure rating and integrated heating



→ www.mysick.com/en/NAV2xx

- Mixed-mode navigation provides both spatial contour data and reflector data
- Long scanning range: up to 70 m on reflectors (up to 35 m on black targets)
- High internal computing power and individual AGV configuration
- Measurement, navigation, and determination of position with highest level of precision from three visible reflectors
- Angular resolution of up to 0.1 degrees
- Navigation, spatial and contour data, reflector marks, angular position and/or raw data collection



→ www.mysick.com/en/NAV3xx



LD-MRS

Rugged multi-layer scanner for harsh environments

Technical data overview

Field of application	Outdoor
Aperture angle	110°
Operating range	0.5 m ... 300 m
Angular resolution	0.125°, 0.25°, 0.5°
Max. range with 10 % reflectivity	50 m / 30 m
Scanning frequency	12.5 Hz ... 50 Hz, object tracking at 12.5 Hz
Ethernet	✓
CAN bus	✓
Serial (RS-232)	✓
Weight	1 kg

At a glance

- Simultaneous measurements on up to 8 scan planes
- Weatherproof thanks to multi-echo technology and IP 69K enclosure rating
- Lightweight, compact design: Approx. 1 kg
- Wide temperature range: -40 °C to +70 °C
- Low power consumption: 8 watts
- Supply voltage: 9 V DC to 27 V DC
- Different angular resolutions in the scanning range are available
- Integrated object tracking



Detailed information

→ www.mysick.com/en/LD-MRS



RAS4xx

Extensive sensing range and large-scale coverage for collision avoidance

Technical data overview

Field of application	Outdoor
Aperture angle	7° x 28° (coned shape)
Operating range	0.2 m ... 20 m
USB	✓
USB (Function)	Parameterization
Switching outputs	3 (relays)
Weight	580 g ... 1,480 g

At a glance

- Optional and simple sensing range adjustment of up to 20 m
- High level of availability even with contamination or in poor weather conditions
- Simple mounting and adjustment
- Additional sender / receiver modules




Detailed information

→ www.mysick.com/en/RAS4xx

REGISTER AT WWW.SICK.COM TODAY AND ENJOY ALL THE BENEFITS



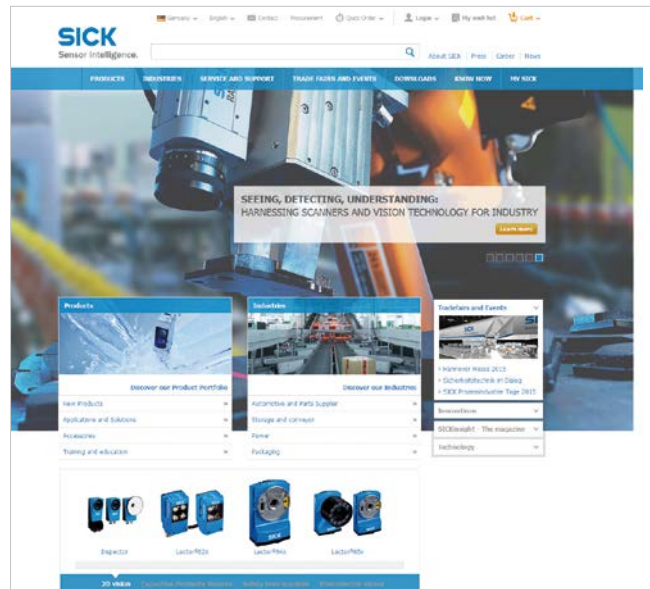


- ✔ Select products, accessories, documentation and software quickly and easily.
- ✔ Create, save and share personalized wish lists.
- ✔ View the net price and date of delivery for every product.
- ✔ Requests for quotation, ordering and delivery tracking made easy.
- ✔ Overview of all quotations and orders.
- ✔ Direct ordering: submit even very complex orders in moments.
- ✔ View the status of quotations and orders at any time. Receive e-mail notifications of status changes.
- ✔ Easily repeat previous orders.
- ✔ Conveniently export quotations and orders to work with your systems.



SERVICES FOR MACHINES AND SYSTEMS: SICK LifeTime Services

Our comprehensive and versatile LifeTime Services are the perfect addition to the comprehensive range of products from SICK. The services range from product-independent consulting to traditional product services.



- 
Consulting and design
 Safe and professional
- 
Product and system support
 Reliable, fast and on-site
- 
Verification and optimization
 Safe and regularly inspected
- 
Upgrade and retrofits
 Easy, safe and economical
- 
Training and education
 Practical, focused and professional

SICK AT A GLANCE

SICK is a leading manufacturer of intelligent sensors and sensor solutions for industrial applications. With almost 7,000 employees and over 50 subsidiaries and equity investments as well as numerous representative offices worldwide, we are always close to our customers. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in various industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services round out our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

Worldwide presence:

Australia, Austria, Belgium, Brazil, Canada, Chile, China, Czech Republic, Denmark, Finland, France, Germany, Great Britain, Hungary, India, Israel, Italy, Japan, Malaysia, Mexico, Netherlands, New Zealand, Norway, Poland, Romania, Russia, Singapore, Slovakia, Slovenia, South Africa, South Korea, Spain, Sweden, Switzerland, Taiwan, Thailand, Turkey, United Arab Emirates, USA, Vietnam.

Detailed addresses and additional representatives → www.sick.com